


# Data Sheet HS ECO System



hydroponicsystems  
international

## Gutter 6,2 x 23


Ref. 010623



- Polypropylene 0,5 mm
- Extended Width: 35,4 cm
- Weight: 460 gr/m<sup>2</sup>

## Eco Spacer

Ref. 020004

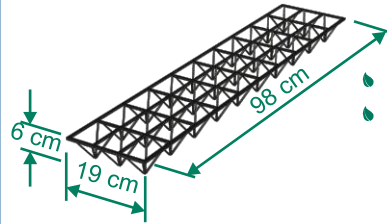

- Polypropylene
- Weight: 224 g/m

## Clip

Ref. 030011



- Polypropylene
- Piece Weight: 2,9 g.
- For fixing the gutter, the spacer and the drip pipe (Ø16-18mm).

## Out-Flow

Ref. 040001



- Polypropylene
- Piece Weight: 60 g.
- Exit Diameter: 26 mm.

## Properties

### Material - Gutter

Polypropylene copolymer, white  
100% virgin material, UV protection

### Maximum load - Spacer

45 Kg/m uniformly.  
Planar surface.  
All legs work equally.

### Estimated duration

4 years\*

### Disinfection of the gutter

We recommend:  
- Sodium hypochlorite (NaClO)  
concentration 200 ppm,  
clearing up afterwards with water.  
- Hydrogen peroxide (H<sub>2</sub>O<sub>2</sub>)

### Silicon - Recommendation

- Maximum adhesion and flexibility  
- 100% airtight and waterproof  
- Tensile strength > 200Kg/10cm<sup>2</sup>  
- Temperature range -40° a +90°C  
- Resistant to: Water, ice, moisture,  
mold, vibration, impact,  
compression, aging and UV

\* Under the following conditions. Always inside a greenhouse.  
Temperatures between 0 ° -50 ° C. No periods of inactivity (should be always working).  
Do not expose to inadequate agro-chemicals.

08/02/2018